


UG67 LORAWAN GATEWAY



UG67 is a robust 8-channel outdoor LoRaWAN® gateway. Adopting SX1302 LoRa chip and high-performance quad-core CPU, UG67 supports connection with more than 2000 nodes. UG67 has line of sight up to 15 km and IP67 waterproof case, which is ideally suited to smart agriculture, smart metering and many other outdoor applications.

UG67 supports not only multiple back-haul backups with Ethernet, Wi-Fi and cellular, but also has integrated mainstream network servers (such as The Things Stack, ChirpStack, etc.), built-in network server and Milesight Development Platform for easy deployment.

Application Example

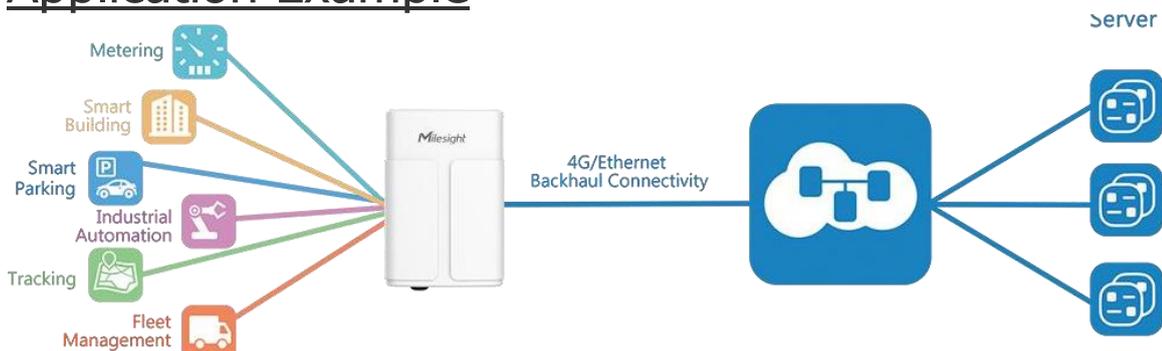

Features

- Quad-core industrial processor with big memory
- Equip with SX1302 chip, handling a higher amount of traffic with lower consumption
- 8 half/full-duplex channels
- IP67 waterproof enclosure and industrial design for harsh environment applications
- Wall or pole mounting optional
- PoE or DC supply optional
- Capacitor for sending alarms in case of power failure
- Multi backhaul backups with Ethernet, cellular (4G) and Wi-Fi
- Enable security communication with multiple VPNs like IPsec/OpenVPN/L2TP/PPTP/DMVPN/WireGuard
- Devicehub and Milesight Development Platform provide easy and centralized management of remote devices
- Compatible with mainstream network servers like The Things Stack, ChirpStack, Actility, AWS, etc.
- Detect and analyze the noise level and provide intuitive diagram for deployment
- Built-in network server and MQTT(s)/HTTP(s) API for easily integration
- Support BACnet/IP and Modbus to integrate LoRaWAN® data to BMS/PLC system easily
- Embedded Python SDK for users secondary development
- Fast and user-friendly programming by Node-RED development tool

Specifications

Hardware System	
CPU	Quad-core 1.5 GHz, 64-bit ARM Cortex-A53
Memory	512 MB DDR4 RAM
Flash	8 GB eMMC
LoRaWAN®	
Antenna Connector	2 × 50 Ω N-Female
External Connectors Channel	8 (Half/Full-duplex)
Frequency Band	CN470/IN865/EU868/RU864/US915/AU915/KR920/
AS923-1&2&3&4 Sensitivity	-140dBm Sensitivity @292bps
Tx Power	27dBm Max
LBT ¹	Support
Ethernet Interface	
Port	1 × RJ45 WAN Port
(PoE PD supported) Physical Layer	10/100/1000 Base-T

Data Rate	10/100/1000 Mbps (Auto-Sensing)
Interface	Auto MDI/MDIX
Mode	Full or Half Duplex (Auto-Sensing)
Ethernet Isolation	1.5 kV RMS

Wi-Fi Interface

Antenna	Internal Antenna
Standards	IEEE 802.11 b/g/n, 2.4GHz
	802.11b: 18 dBm +/-2.0 dBm (11 Mbps)
	802.11g: 15 dBm +/-2.0 dBm (6 Mbps)
	802.11g: 15 dBm +/-2.0 dBm (54 Mbps)
Tx Power	802.11n@2.4 GHz: 14 dBm +/-2.0 dBm (MCS0_HT20)
	802.11n@2.4 GHz: 14 dBm +/-2.0 dBm (MCS7_HT20)
	802.11n@2.4 GHz: 13 dBm +/-2.0 dBm (MCS0_HT40)
	802.11n@2.4 GHz: 13 dBm +/-2.0 dBm (MCS7_HT40)

Cellular Interface (Optional)

Network	4G LTE
Antenna	Internal Antenna
SIM Slot	1 (mini SIM-2FF)
Technology	GPS/GLONASS/QZSS/SBAS
Antenna	Internal Antenna
Sensitivity	-161dBm@Tracking, -149dBm@Acquisition, -161dBm@Re-acquisition
Position Accuracy	2.5m CEP (Open Air)

Others

LED Indicators	1 × SYS, 1 × LoRa, 1 × LTE
Reset Button	1 × RST
USB	1 ×
Type-C for Console Power Connector	1 × M12
Built-in	Watchdog, RTC, Timer

Power Supply and Consumption

Power Supply	1. 802.3 af PoE 2. 6~12 VDC via M12 Connector
Power Consumption	Typical 3.6 W, Max 4.8 W

Physical Characteristics

Ingress Protection	IP67
--------------------	------

Material & Color	PC (UL94 V0) + ADC-
12 Aluminum, White Weight	1463g
Dimensions	240 x 164 x 90.9 mm (9.45 x 6.46 x 3.58 in)
Installation	Wall or Pole Mounting
Environmental	
Operating Temperature	-40°C to +70°C (-40°F to +158°F)
Storage Temperature	Reduced Cellular Performance Above 60°C -40°C to +85°C (-40°F to +185°F)
Relative Humidity	0% to 95% (non-condensing) at 25°C/77°F
Approvals	
Regulatory	CE, FCC, RCM,TELEC, ANATEL
Environmental	RoHS

Software Specifications

LoRaWAN®	
Supported Devices	Around 2000 Class A/B/C Devices (10 min uplink interval) Protocol
A/Class B/Class C	V1.0 Class A/Class B/Class C and V1.0.2 Class A/Class B/Class C
DeviceHub LNS, Milesight Development Platform LNS, Milesight IoT	
Compatibility	Cloud, etc.
Packet Forwarder	
Noise Analyzer	Scan the noise of the frequencies for channel selection Packet Filter
packets	Add whitelist or blacklist to filter the packets
Data Retransmission ²	Re-transmit the data packets after network recovery
Embedded Network Server	
Decode and Encode	Inbuilt Milesight devices codec library, support custom codec setup
Gateway Fleet	Work as the network server of other Milesight blind-filling gateways Multicast
	Support multicast downlink control



Uniconverge Technologies Pvt. Ltd.

C-56/11, Ground floor, Near Stellar IT Park, Sector -62, Noida, U.P. – 201309

CIN :- U72300UP2013PTC057272

GSTIN: 09AABCU6143Q1ZQ

Integration MQTT, HTTP(s), BACnet/IP, Modbus TCP, Modbus RTU over TCP

Network

FUOTA Upgrade FUOTA supported end devices

Integration MQTT, HTTP(s), BACnet/IP, Modbus TCP, Modbus RTU over TCP

Network

Network Protocols PPPoE, SNMP v1/v2c/v3, TCP, UDP, DHCP, DDNS, HTTP, HTTPS, DNS, ARP, SNTP, Telnet, SSH, MQTT, MQTTS, BACnet/IP, Modbus RTU over TCP, Modbus TCP, etc.

VPN Tunnel OpenVPN/IPsec/PPTP/L2TP/GRE/DMVPN/WireGuard

Firewalls Access Control, DMZ, Port Mapping (DNAT), MAC Binding, Filtering (IP&Domain)

DDNS Supported >16 service providers, others can be configured manually

Multilevel Authority Multiple Levels of User Authority

Reliability WAN Failover

Diagnostics Tools Ping, Traceroute, Tcpdump, QXDM, Log Server

Wi-Fi Interface

Standards IEEE 802.11 b/g/n, 2.4GHz

Mode AP or Client mode

Security AP: WPA-PSK/WPA2-PSK authentication, WEP/TKIP/AES encryption
Client: WPA-PSK/WPA2-PSK/WPA-Enterprise/WPA2-Enterprise authentication, WEP/TKIP/AES encryption

Management

Configuration Web, CLI (SSH/Telnet), SMS, On-demand dial up, SNMP, HTTP API, MQTT API, Milesight Development Platform, DeviceHub

Update Web, Milesight Development Platform, DeviceHub


Device Management Milesight Development Platform, DeviceHub

Event Alarm Power On/Off, Network Up/Down, VPN Up/Down, etc.

Others

App Python SDK, Node-RED


Hardware Overview

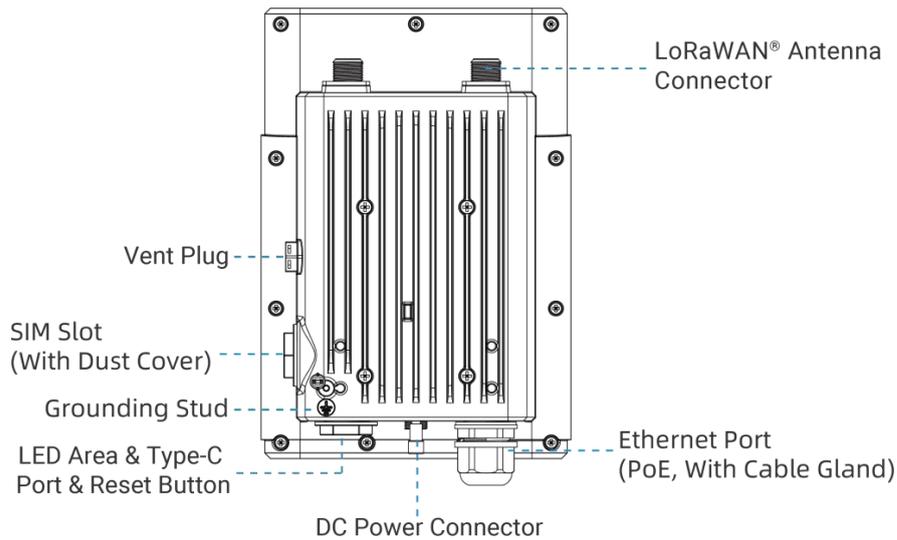

Accessories



1 × PoE Injector



1 × Mounting Bracket



4 × Wall Mounting Kits




1 × Antenna Coaxial Cable (1m)



1 × M12 DC Power Cable (30cm)



2 × LoRaWAN® Antennas (60cm)



1 × Short Mounting Backboard Kit



Uniconverge Technologies Pvt. Ltd.

C-56/11, Ground floor, Near Stellar IT Park, Sector -62, Noida, U.P. – 201309

CIN :- U72300UP2013PTC057272

GSTIN: 09AABCU6143Q1ZQ